



### Product

CSC

### Application

Ceiling mounted, supply and return

### Construction

Aluminium painted white RAL 9010 with sealing gasket

### SPECIFICATION

Circular diffusers with adjustable single cone

### MOUNTING

With screws on diffuser neck

### ACCESSORIES

Butterfly balancing damper (SF)

Capture damper (SC)

Equalizer (EQ1)


Standard plenum (PCOS)

Insulated plenum (PCOI)

From dn. 150 available on 595x595 mm panel


## DIMENSIONS

CSC Model	D mm	De mm	D1 mm	D2 mm	C mm	H mm
CSC 100	98	198	194	230	30	75
CSC 150	148	288	280	335	45	105
CSC 160	158	288	280	335	45	105
CSC 200	198	370	360	423	48	118
CSC 250	248	461	445	517	48	130

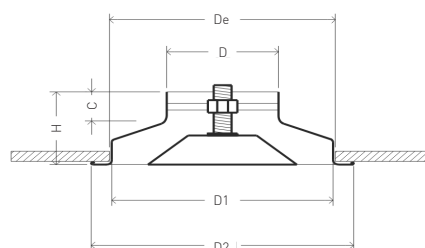

## PLENUM DIMENSIONS PDOS/PDVS

DN mm	ØA mm	ØB mm	ØD int. mm	ØD 1 ext. mm	F mm
160	190	180	160	160	75
200	240	230	200	200	75
250	290	280	250	250	75

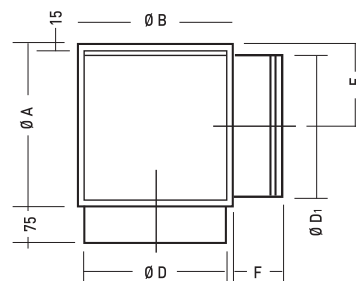

Standard/insulated plenum PCOI

Standard/insulated plenum PCOS

## QUICK SELECTION CHART

