


GRF

Perforated screen return grille

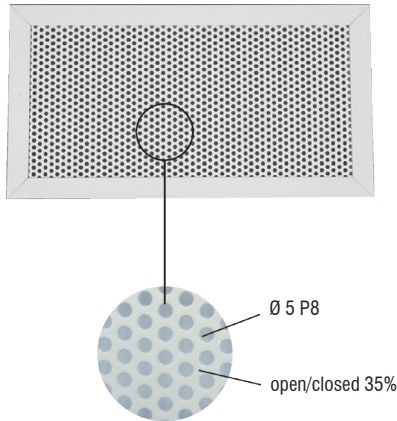

SPECIFICATION

Perforated screen return grille

Product

GRF

Application

Wall mounted, return

Construction

Aluminium painted frame white RAL 9016

Steel sheet screen painted white RAL 9016

MOUNTING

Fixing with clips or front screws (on request)


ACCESSORIES

PBOS/PBOI Standard or insulated galvanised steel plenum.


KSEL Balancing damper with opposed blade movement.

KCTC Galvanised steel sheet mounting counter-frame


DRAWINGS

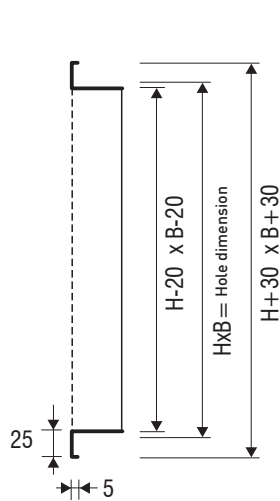


GRF



GRF + KSEL

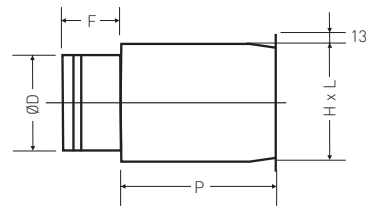

PBOS-PBOI
Plenum with rear connection

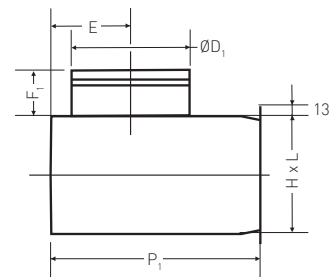

PBVS-PBVI
Plenum with side connection



SELECTION TABLE

GRF Model	A _k m ²	Q [m ³ /h]		L _{WA} [dB(A)]		Dpt [Pa]	
		min	max	min	max	min	max
300x300	0,0305	120	260	-	21	10	50
400x300	0,0422	160	360	-	22	10	50
500x300	0,0543	200	460	-	23	10	50
600x300	0,0668	250	560	-	23	10	50
800x300	0,0924	350	780	-	25	10	50
1000x300	0,1190	450	1000	-	26	10	50
400x400	0,0584	220	490	-	23	10	50
500x400	0,0752	280	630	-	24	10	50
600x400	0,0924	350	780	-	25	10	50
800x400	0,1280	480	1070	-	26	10	50
1000x400	0,1647	620	1380	-	27	10	50
500x500	0,0968	360	810	-	25	10	50
600x500	0,1190	450	1000	-	26	10	50
800x500	0,1647	620	1380	-	27	10	50
1000x500	0,2120	790	1770	-	28	10	50
600x600	0,1462	550	1220	-	26	10	50
800x600	0,2025	760	1690	-	27	10	50
1000x600	0,2606	980	2180	-	28	10	50

QUICK SELECTION CHART

