



Product	BDM
Application	Supply or return
Construction	In grey painted steel

SPECIFICATION

Pressed aluminium recessed grille

MOUNTING

Visible screws

OPERATING DATA

Vk: effective velocity (m/s)


m³/h: flow rate

Pa: pressure drop in Pascal

dB(A): noise level index

DIMENSIONAL

Model LxH	Effective section m ²	Flow rate m ³ /h			
		Vk 2 m/s	Vk 3 m/s	Vk 4 m/s	Vk 5 m/s
200x100	0,014	100	150	200	250
300x100	0,021	151	227	302	378
400x100	0,029	209	313	418	522
150x150	0,017	61	122	183	245
300x150	0,033	238	356	475	594
400x150	0,044	317	475	633	792
200x200	0,029	209	313	418	522
300x200	0,043	310	465	620	774
400x200	0,058	418	626	835	1044
300x300	0,065	468	702	936	1170
400x300	0,087	626	940	1253	1566
Pa		3	6	10	15
dB(A)		20/25	25/30	30/35	35/40

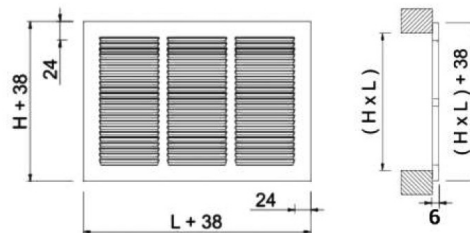

BDM